

## HTK-2G/ZTR (loose, pre-assembled)



### Application range

- > Adjustable fastening element
- > To secure roofing membrane and insulating material to sheet steel substructures  $\geq 0.70 \text{ mm} \leq 1.5 \text{ mm}$
- > For new buildings
- > Ideal for slope insulation up to 590 mm
- > To reduce thermal bridges


### Properties

- > DABO® screw: case-hardened steel, Climadur coated - high-quality coating to improve corrosion protection (15 rounds Kesternich, DIN 50018)
- > Stress plate: high-grade plastic material
- > Slip resistance through support

### Cross references

Bit hexalobular TX25-1/4"  
Hip belt flat roof


### HTK-2G-ZTR-110-185-95/120

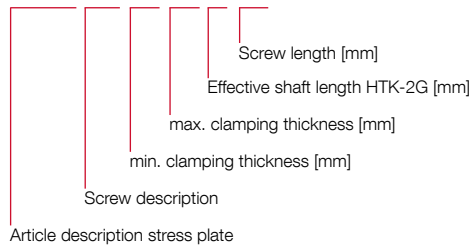

### Applications



### Technical specifications



### Certifications



### Product video



### Installation process



### Product online



Order description	Total panel thickness [mm]	Effective Shaft length L [mm]	Screw length [mm]	PU [pieces]	Price/100 [EUR]	Article number	EAN
HTK-2G-ZTR-110-185-95/120-loose, pre-assembled	110-185	95	120	100		3709512028	4061245105550
HTK-2G-ZTR-160-285-145/170-loose, pre-assembled	160-285	145	170	100		3714517028	4061245105567
HTK-2G-ZTR-240-365-225/170-loose, pre-assembled	240-365	225	170	100		3722517028	4061245105574
HTK-2G-ZTR-340-465-325/170-loose, pre-assembled	340-465	325	170	100		3732517028	4061245105581
HTK-2G-ZTR-340-590-325/300-loose, pre-assembled	340-590	325	300	100		3732530028	4061245105598