

EJOT[®]

LEED profile

EJOT[®] Fastening solutions for external thermal insulation composite systems

Information brochure for „Leadership in Energy and Environmental Design“ (LEED)

brands & values[®]
sustainability consultants

Publisher

brands & values GmbH
Altenwall 14
28195 Bremen

© brands & values GmbH. Any kind of reproduction, including excerpts, is only permitted with the permission of the publisher.

Structure of the document

This document contains the data on a building material / building product that are relevant for the LEED system. It is primarily intended to support planners and architects in obtaining the product information required for their purposes with a reasonable amount of effort.

Within the framework of an assessment, product characteristics are placed in the context of the LEED assessment. For this purpose, applicable individual criteria are identified and transferred to the building level. In this way, the potentially achievable LEED points are determined.

LEED version:

LEED certification system, Building Design and Construction (BD+C) in the version 4.1.

Date of issue 09.07.2021

Validity 08.07.2026

Legal notice:

The information on individual building products contained in this document was provided to brands & values GmbH by the respective manufacturer. brands & values assumes no liability for the accuracy, timeliness, completeness or quality of the information contained herein. The texts and graphics contained herein, as well as the information on individual building products, are protected by copyright and are in part subject to industrial property rights; their use is only permitted with the written consent of brands & values GmbH or the respective rights holder. The same applies to the duplication, editing, storage, processing or reproduction of individual contents or complete pages of this document.
© brands2021 & values GmbH

1 General information

The Leadership in Energy and Environmental Design (LEED) certification system serves to objectively describe and evaluate the sustainability of buildings and neighbourhoods. It was developed by the non-profit organisation USGBC (U.S. Green Building Council). The entire LEED certification is based on the US American standards according to ASHRAE (American Society of Heating, Refrigerating and Air-Conditioning Engineers, Inc.). Quality is assessed in a comprehensive sense, over the entire life cycle of the building. The LEED certification system is internationally applicable. Due to its flexibility, it can be applied precisely to different building uses.

Types and categories of use

The following types and categories of use according to LEED v4.1 are covered by this profile:

Building Design and Construction (BD+C)

- New Construction
- Core and Shell
- Schools
- Retail
- Data Centers
- Warehouses and Distribution Centers
- Hospitality
- Healthcare


In total, up to 110 points can be achieved in each use category.

Evaluation categories and their weighting

The usage type „Building Design and Construction (BD+C)“ includes the category „New Construction“ with the following rating categories:


- | | | | |
|-------------------------------|-----------|-------------------------------------|-----------|
| • Integrative Process | 1 Point | • Materials and Resources (MR) | 13 Points |
| • Location and Transportation | 16 Points | • Indoor Environmental Quality (EQ) | 16 Points |
| • Sustainable Sites | 10 Points | • Innovation | 6 Points |
| • Water Efficiency | 11 Points | • Regional Priority | 4 Points |
| • Energy and Atmosphere | 33 Points | | |

This results in the following weighting for the category „New Construction (NC)“:

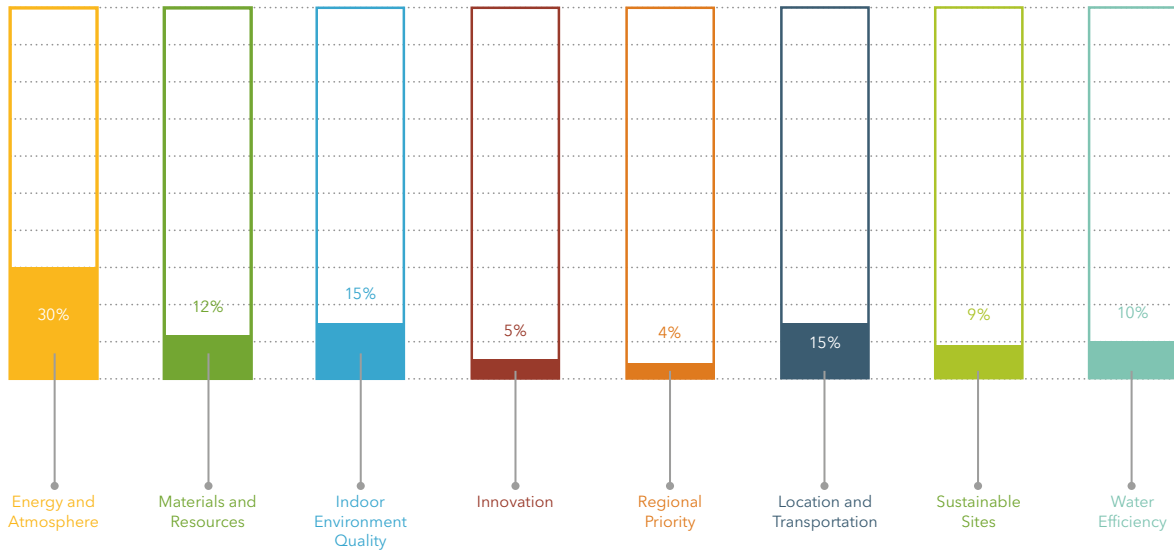

Each of the listed assessment categories is subdivided into several individual criteria, through the fulfilment of which the total points of an assessment category can be achieved. There are also individual criteria that form the prerequisite for the award of a LEED certificate. The „Materials and Resources“ (MR) rating category is subdivided as follows:

0	0	0	Material and Resources (MR)		13
Y			Prereq	Storage and Collection of Recyclables	Required
Y			Prereq	Construction and Demolition Waste Management Planning	Required
●	●	●	Credit	Building Life-Cycle Impact Reduction	5
●	●	●	Credit	Building Product Disclosure and Optimization - Environmental Product Declarations	2
●	●	●	Credit	Building Product Disclosure and Optimization - Sourcing of Raw Materials	2
●	●	●	Credit	Building Product Disclosure and Optimization - Material Ingredients	2
●	●	●	Credit	Construction and Demolition Waste Management	2

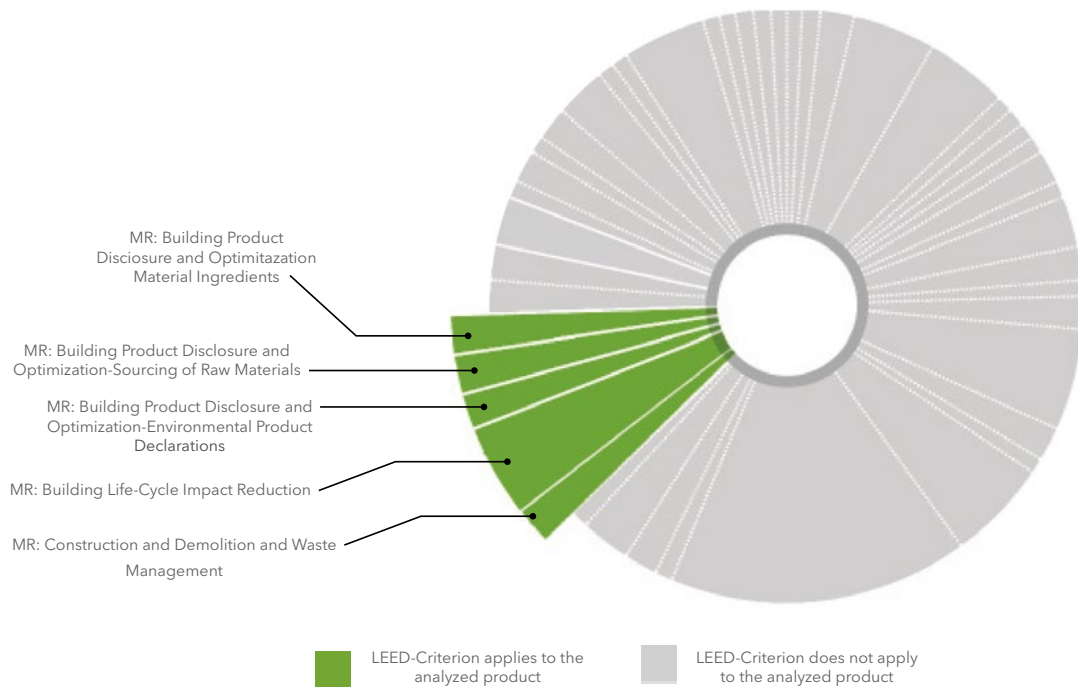


Notice:

It should be noted that although the analysed building product has an influence on the degree of fulfilment of a group of criteria (e.g. „eco-balance“ or „life-cycle costs“), this proportion is not solely determined by the analysed product, since in the context of the building assessment:

- all materials must be considered in the context of the building and material-independent factors also play an important role in the assessment (e.g. the reduction of environmental impacts through construction activity or the access of a building to a quality transport network).

LEED certification levels

Based on currently (100+10 bonus) possible points, the LEED rating process awards the following certification levels:

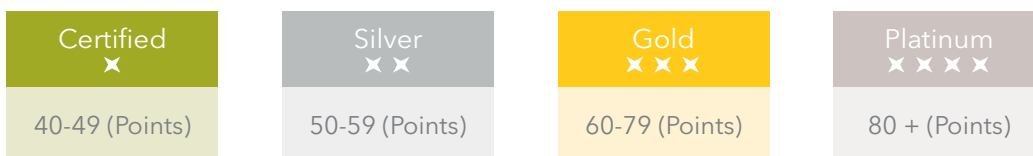

The LEED certification of a building is a high-profile expression of its ecological value, which is particularly evident to investors, tenants and residents. Sustainable buildings protect the environment and natural resources. They often have significantly lower operating costs, create more living comfort and increase the overall value of a property.

2 Result overview

Influence on the LEED criteria

Materials and Resources



Building Life-Cycle Impact Reduction

Option 4	<p>Whole-Building Life-Cycle Assessment</p> <ul style="list-style-type: none"> ➤ building Life cycle assessment according to ISO 14040/44 is available for: <ul style="list-style-type: none"> Fastening of external thermal insulation composite systems
----------	--

Building Product Disclosure and Optimization - Environmental Product Declarations

Option 1	<p>Environmental Product Declaration (EPD):</p> <ul style="list-style-type: none"> ➤ Product-specific EPD, Type III ➤ Assessment as a whole product
----------	---

Building Product Disclosure and Optimization - Material Ingredients

Option 2	<p>Material Ingredient Optimization</p> <ul style="list-style-type: none"> ➤ International Alternative Compliance Path - REACH Optimization: No substances are contained that meet the REACH criteria for Substances of Very High Concern ➤ Note: SVHC <0,1 % fulfilled according to REACH, a check according to LEED for %0,01 (100 ppm) is not available. <p>Fastening solutions for external thermal insulation composite systems under this credit Health Product Declaration (HPD) ➤ not available Material Safety Data Sheet (MSDS) ➤ MSDS is available on request GreenScreen v.1.2 Benchmark ➤ no REACH compliance ➤ yes . The formulation is tested according to the current REACH list of candidates. The formulation does not contain any substances of concern. Certificates are available on request</p>
----------	---

Building Product Disclosure and Optimization - Sourcing of Raw Materials

Option 1

Participation in an extended producer responsibility programme
➤ no

Construction and Demolition Waste Management

Option 2

Reduction of the total amount (construction and demolition) waste material
➤ 0,139 kg/ m² recyclable units in 0.201 kg mixed construction waste

3 Detailed evaluation

Influence on the LEED criteria

Materials and Resources



Building Life-Cycle Impact Reduction

Option 4: Whole-Building Life-Cycle Assessment

For new buildings (buildings or sections of buildings), the structure and shell of a project must be subjected to a life cycle assessment, demonstrating that a reduction of at least 10% has been achieved compared to a reference building in at least three of the six impact categories (one of which must be global warming potential). In no impact category assessed in the life cycle assessment may an increase of more than 5 % be achieved compared to the reference building.

Prerequisite for this: Life cycle assessments of the building products actually used:

- A manufacturer's own EPD in accordance with EN 15804 for:
 - Fastening solutions for external thermal insulation composite systems
- The ecological life cycle analysis is supported at building level on the basis of verified life cycle assessment results according to ISO 14040/44.

Building Product Disclosure and Optimization (Environmental Product Declarations)

Option 1: Environmental Product Declaration (EPD)

Product-specific EPD, type III:

Source	EPD-EJO-20210060-IBD1-EN
Product	Fastening solutions for external thermal insulation composite systems
Declared Unit	The declared unit is an average anchor system for fixing 1 m ² of ETICS with a specific length of 195 mm, consisting of six individual systems

Standards: ISO 14025 and 14040/44, as well as EN 15804

- Product is weighted at 100%

Building Product Disclosure and Optimization - Material Ingredients

Option 2: Material Ingredient Optimization

International Alternative Compliance Path - REACH optimisation:

The product does not contain any ingredients that are listed in the list of substances subject to authorisation or in the REACH candidate list. Certificates are available on request.

- Note: SVHC <0,1 % fulfilled according to REACH, a review according to LEED on 0,01% (100 ppm) is not available.
- Health Product Declaration (HPD): Not available
- Safety Data Sheet (MSDS): Will be provided on request.
- European Technical Assessments as well as General Building Inspectorate Test Certificates are available on request.

Building Product Disclosure and Optimization - Sourcing of Raw Materials

Option 1: Participates in an extended producer responsibility program

- No

Postconsumer recycled content:

- 8% Steel scrap (based on the entire fastening system)

Preconsumer recycled content

- not present

Construction and Demolition Waste Management

Option 2: Reduction of Total Waste Material

Do not generate more than 7.5 pounds of construction waste per square foot (36.6 kilograms of waste per square meter) of the building's floor area for all BD+C projects except Warehouses and Distribution Centers.

- Theoretically, it is possible to separate the individual components from each other by type.
- In practice, the entire roof structure is deposited in landfills.
 - Per unit 0.201 kg/m² is 0,139 kg recyclable and 0,062 kg is landfilled.

4 Life Cycle Information

The product life cycle is mapped and evaluated via a life cycle assessment:



EPD-Standard	EN 15804; ISO 14025
Programme holder	Institut Bauen und Umwelt e.V. (IBU)
Declaration number	EPD-EJO-20210060-IBD1-EN
Valid until	08.07.2026
Declared unit	The declared unit is an average anchor system for fixing 1 m ² of ETICS with a specific length of 195 mm, consisting of six individual systems.
Specific weight	Per system 0,201 kg/ m ²
Transport and product packaging	The products are packed in cardboard boxes or foil bags. Transport to the customer is stacked, on wooden pallets that are reused as circulation pallets.
Production	Dowel sleeves: conventional injection moulding technique Screws: by non-cutting cold forming in the so-called cold extrusion process

Further product and site-specific information can be found in the EPD.

The EPD data have been published on various portals:

- ÖKOBAUDAT of the Bundesinstituts für Bau-, Stadt- und Raumforschung (BBSR), www.oekobaudat.de/datenbank
- ECO Platform, www.eco-platform.org/
- Institut Bauen und Umwelt e.V., www.epd-online.com
- Website Ejot, www.ejot.de

5 Evidence

In the context of LEED projects, corresponding certificates, brochures and other relevant documents are made available.



Owner

**EJOT SE & Co. KG
Market Unit Construction**

In der Stockwiese 35
57334 Bad Laasphe
Germany
T +49 2752 908-0
F +49 2752 908-731
bau@ejot.com
www.ejot.de/bau



Creator & Publisher

brands & values GmbH
Altenwall 14
28195 Bremen
Germany
Tel.: +49 421 709084 - 33
Email: info@brandsandvalues.com
Web: www.brandsandvalues.com